


KRUŽÍK

SIDE SECTIONAL DOORS

Quality Czech doors, made to measure


SIDE SECTIONAL DOORS

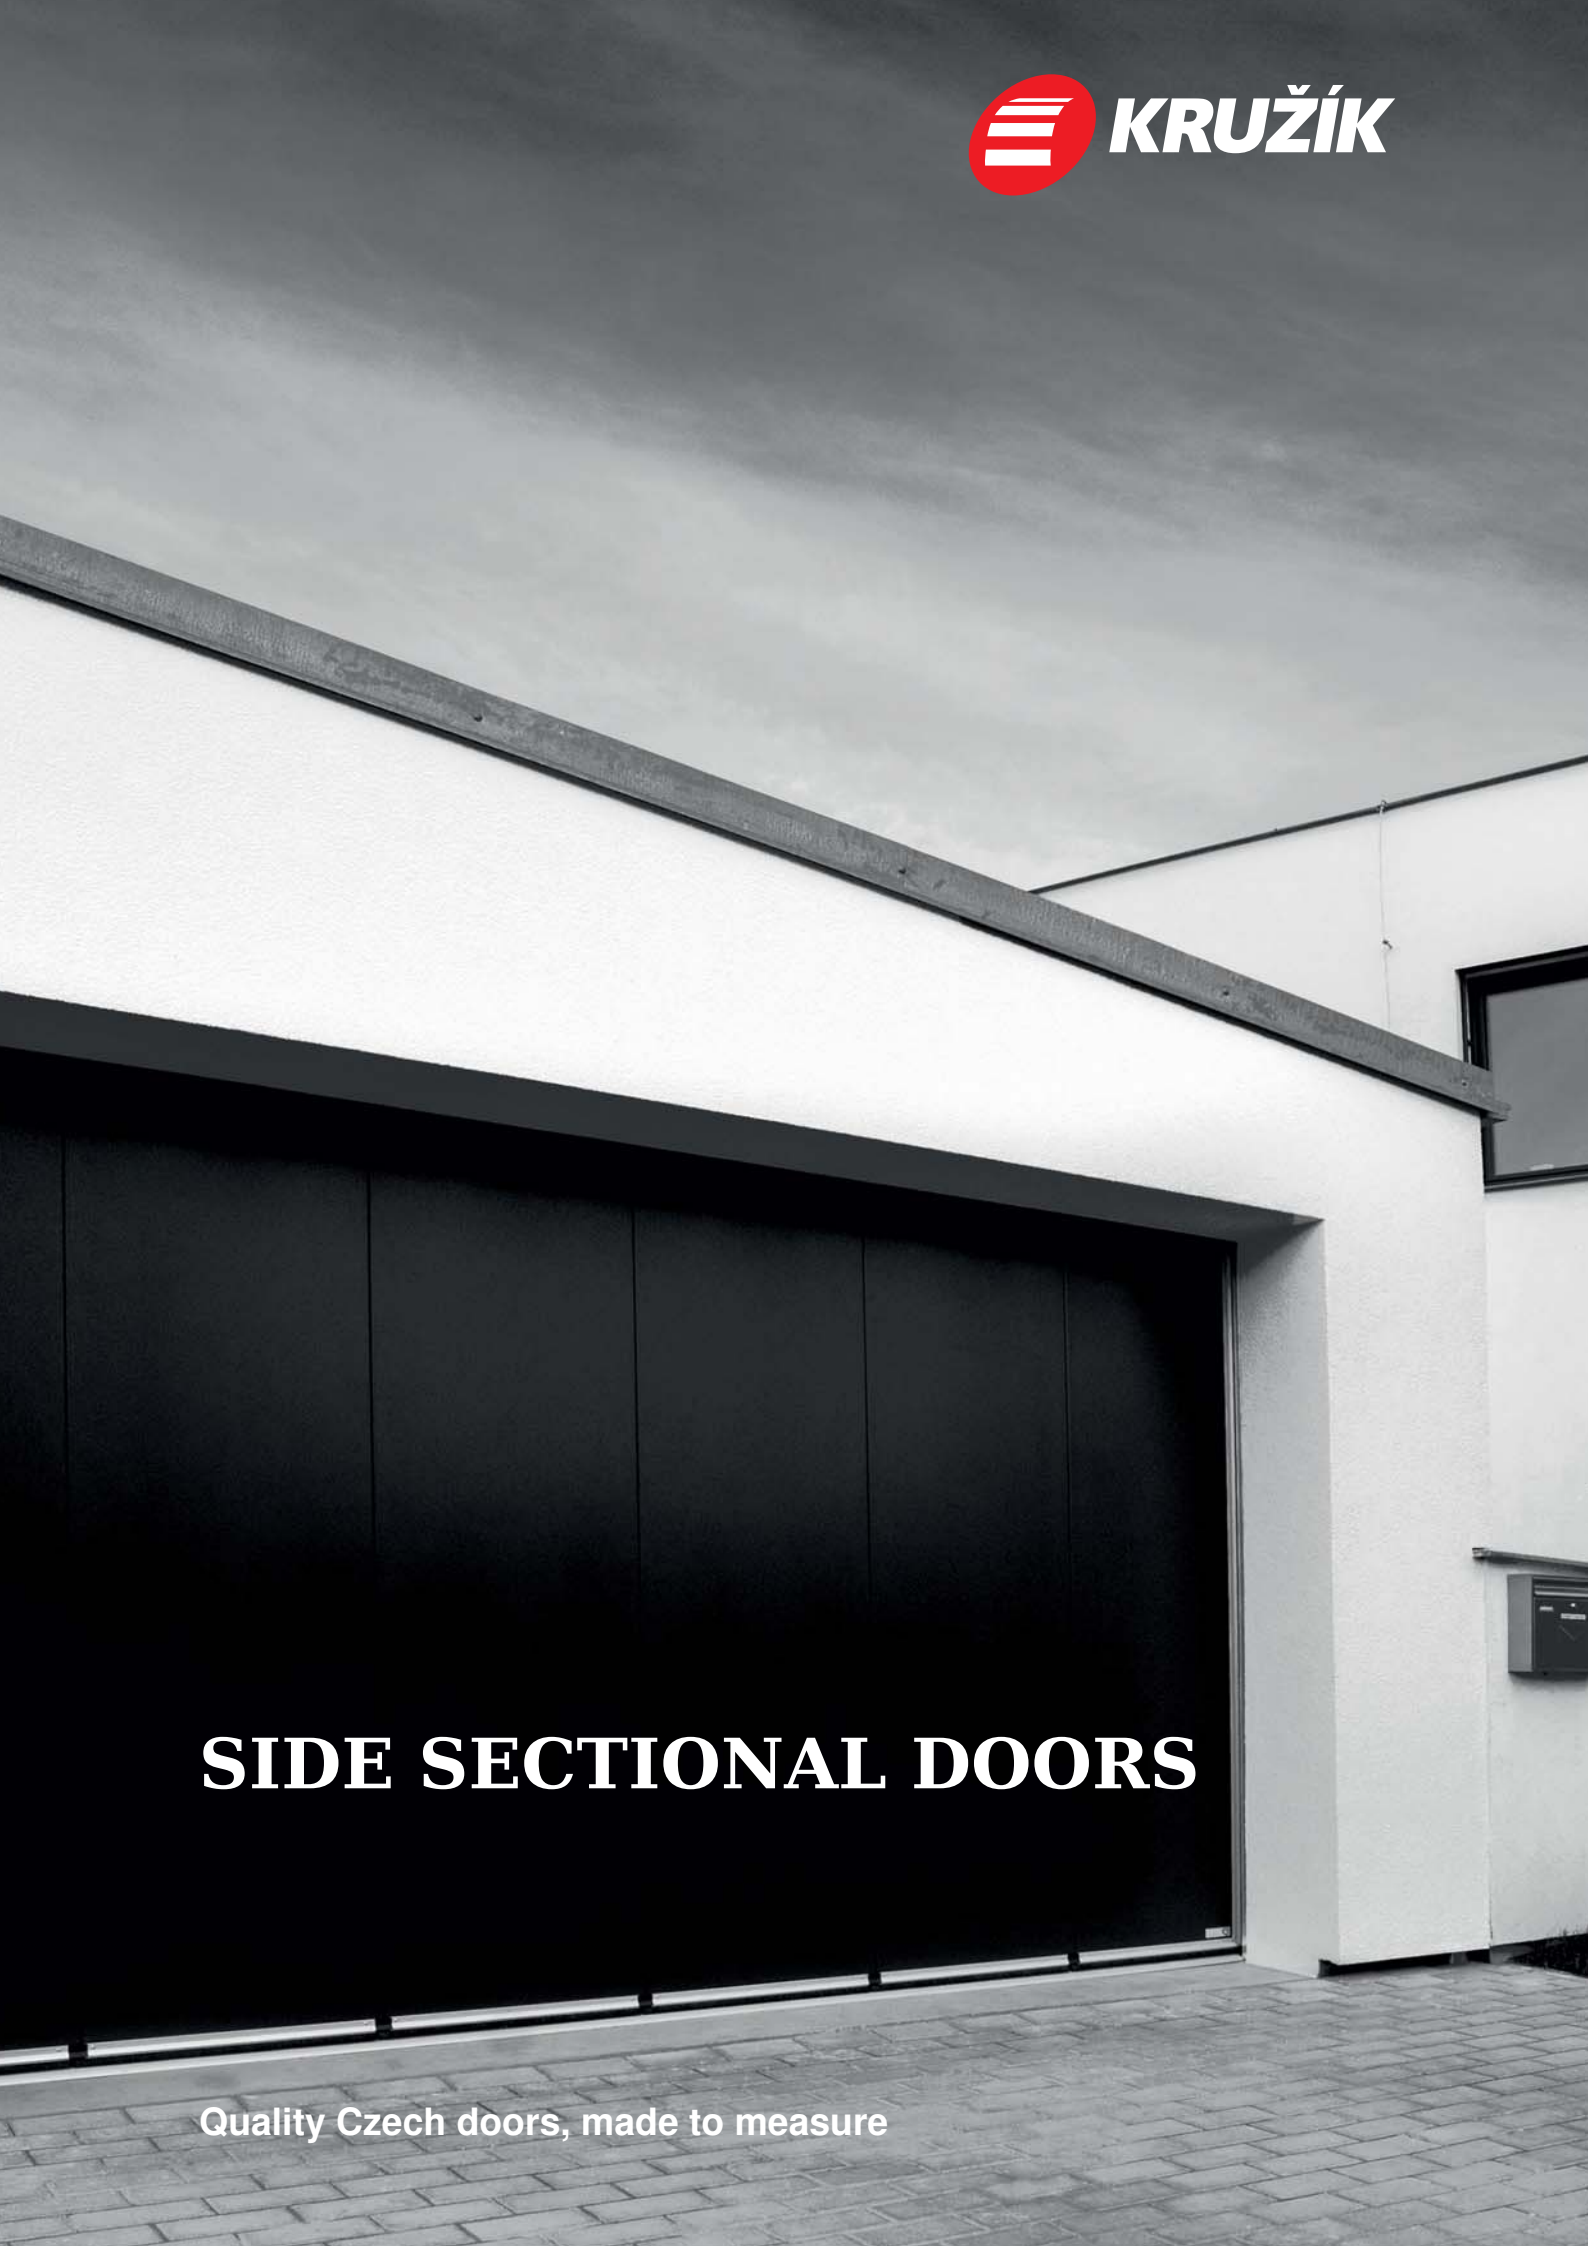

A Structural opening width: max. 5000 mm
B Structural opening height: max. 3000 mm
C Headroom: min. 90 mm
D1 Side clearance at curve: min. 125 mm
D2 Opposite side: 90 mm without handle; 150 mm with handle
E See side-clearance table in the technical documentation

Door operating area
Keep the marked area clear of all obstructions to allow the door to move freely.
- Maximum door weight: 180 kg

- The finished floor must be in place.
- Clear opening width is retained; with a wicket door: A - 200 mm.
- Maximum track level variation: 2 mm over the full lengths A and E.

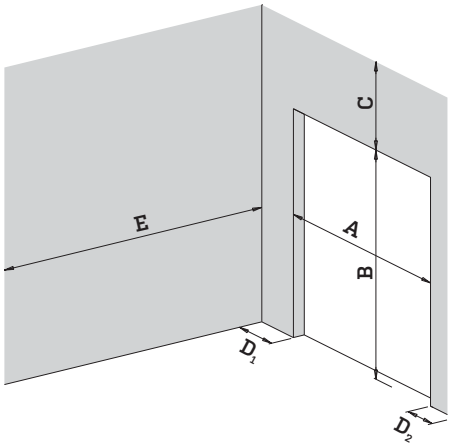

Sliding doors are an attractive alternative to conventional sectional, side-hinged or roller doors. Their main advantage is that they can be opened just part of the way for convenient pedestrian access, helping to make significant energy savings. Another major benefit is that installing sliding doors does not reduce the clear opening height.

Like all doors manufactured by KRUŽÍK s.r.o., our sliding doors are always made to measure. They use sections 500 or 610 mm wide, made from sheet steel up to 0.6 mm thick, galvanised on both sides. A 40 mm core of high-quality PUR foam provides very good thermal insulation.

The sections are manufactured using a special process from materials that contain or generate no CFCs, mould, bacteria or insecticides. No toxic fumes are released in the event of a fire.

All sliding doors feature finger-trap protection between sections, a benefit especially valued by families with children. Our TOP sliding doors always have a robust aluminium structure for a long service life.

A brush seal system seals the doors. Any panel type and most accessories available for sectional doors can be used, including a wide range of glazing, stainless steel decorative elements, pull handles, lever handles and ventilation grilles. Pull handles and lockable lever handles must be chosen so that they clear the jamb when the door opens.

QUALITY CZECH DOORS, MADE TO MEASURE



Choose from almost 3,000 colours or more than 60 woodgrain finishes, premium metal-effect finishes and coloured foils.



TOP sliding doors feature state-of-the-art aluminium hardware guided in an upper track, a system offered by no other Czech door manufacturer. With its natural aluminium finish, this hardware combines an elegant appearance with quality and reliable operation. A robust aluminium stop on the closing side ensures a proper seal. The low-profile threshold is unobtrusive and easy to clean. We now also offer a hinged first section for pedestrian access without sliding the door open - effectively an integrated wicket door.
TOP doors require just 90 mm of headroom and 125 mm of side clearance on the curved-track side.



The hardware can incorporate a curve, allowing the door to slide into the garage along the side wall. Alternatively, a straight track allows the door to slide alongside the opening.

Motorised versions use the same operators as sectional doors. We always recommend a nylon drive track for the quietest possible operation. A level floor is essential for installation: the maximum permitted level variation is 2 mm across both the width and depth of the door. An uneven floor may prevent the door from working correctly.

10 REASONS TO CHOOSE KRUŽÍK DOORS

1. KRUŽÍK s.r.o. is a Czech family-owned company with no foreign capital and a history of more than 27 years.

2. All our doors are made to measure, making every door unique.

3. KRUŽÍK s.r.o. is well established in the European market. We currently export more than a third of our production to 13 European countries. Our doors have also reached destinations such as Iceland, Armenia, the United Arab Emirates and North Korea.

4. We welcome unusual projects. Our technicians are always ready to meet customer needs and find the best solution for any structural opening.

5. By continually improving and optimising our manufacturing processes, we can offer very short lead times. We deliver doors within 10 working days of order confirmation in the Czech Republic, and within 15 working days abroad.

6. We use only top-quality panels made in the EU by leading European manufacturers on modern production lines. Our panels are always 40 mm thick, never thinner, giving all our doors excellent thermal insulation.

7. Our in-house paint shop lets us match the colour of our doors precisely to customer requirements. We use only high-quality PUR paints and offer almost 3,000 colours.

8. We offer the widest range of woodgrain finishes on the market. Our range currently includes more than 60 woodgrain finishes, premium metal-effect finishes and coloured foils, and continues to grow.

9. We keep almost all spare parts in stock, enabling us to supply components quickly for repairs and emergencies, such as doors damaged by a vehicle. Our spare parts are very competitively priced.

10. Another important reason to choose KRUŽÍK doors is the excellent value for money offered by all our products.

AUTHORISED DEALER

KROMĚŘÍŽ HEAD OFFICE
Veleslavínova 2357
767 01 Kroměříž
Tel.: +420 800 100 231
Tel.: +420 573 336 233
Fax: +420 573 343 582
Email: kruzik@kruzik.cz

PRAGUE BRANCH
Herbenova 38
102 00 Praha 10 Hostivař
Tel.: +420 267 710 901
Tel.: +420 267 710 696
Email: praha@kruzik.cz

KRUZIK UKRAINE
s. Ivanivtsi, ul. Miru, 3
Mukachevo 89622
Tel.: +38 0964585699
Tel.: +38 0505235969
Email: kruzik@kruzik.com.ua
Web: www.kruzik.com.ua

WWW.KRUZIK.EU